



**NewAge**

## Sports and Commercial Wood Floor Care Program




**Your Lowest Total Cost Solutions  
for Sports and Commercial Wood  
Floor Care**



**TRIPLE S**



## SSS Recoat System



### 1. Clean

- Dry mop or sweep to remove loose dirt, grit, tape, or gum from the floor.

### 2. Optimize Adhesion by using an Autoscrubber or a Buffer

Using an Auto Scrubber\*

- Set at normal maintenance setting for proper application rate and pad pressure. Add Recoat Conditioner and Prep Cleaner to scrubber. Use a FPP or a black pad driven by whatever maintenance pad is typically used. This step cleans and conditions the existing finish to optimize adhesion.
- Tack with Recoat Conditioner and Prep Cleaner to remove all residue.
- Abrade the floor once it has dried (approx. 30 min.) with a Prep Pad or a 120-grit screen.
- Tack with Recoat Conditioner and Prep Cleaner or water to remove all residue after abrading. An autoscrubber may be used for this procedure.
- \* recommended for sport floors only

Using a Buffer

- Apply NewAge Recoat Conditioner and Prep Cleaner with a string mop over a 3'x 24' section of the floor. Recoat Conditioner and Prep Cleaner is ready to use, no mixing required.
- While wet, deep clean and condition the floor with a standard buffer, using a Floor Prep Pad (FPP) or black pad. This cleans and conditions the existing finish to optimize adhesion.
- Tack with Recoat Conditioner and Prep Cleaner to remove all residue after scrubbing.
- Abrade the floor once it has dried (approximately 30 minutes) with two FPP's (one driving the other) or a 120-grit screen to prepare for the finish coat.
- Tack with Recoat Conditioner and Prep Cleaner to remove residue after abrading.

### 3. Finish

- Apply a NewAge waterborne or oil-modified sport finish.



### NewAge Replay Maintenance Cleaner

A waterborne, environmentally responsible cleaner specifically formulated for use in the preparation of existing wood sport floors, or for periodic maintenance to clean all polyurethane finished wood floors without leaving any residue. NewAge Replay Maintenance Cleaner is a concentrate, to be diluted with water according to directions.

**5 gallon pail - 32008**

**1 gallon (4/cs) - 32009**



### NewAge Recoat Conditioner and Prep Cleaner

NewAge Recoat Conditioner and Prep Cleaner is a specially formulated recoat adhesion system for all types of polyurethane finished hardwood floors, including factory prefinished floors. This product conditions and prepares the existing finish to optimize adhesion of the new coat of finish.

**5 gallon pail - 32004**

**1 gallon (4/cs) - 32007**

**What the Pros Know:** Preventative Maintenance will extend the life of your floor finish. Simple steps such as placing walk-off mats in door ways to keep out dirt and grit and avoiding excess moisture from tracked in water or leaks will prolong the life of your floor.

Having a planned daily maintenance schedule of dry mopping or damp mopping over spills can help reduce overall labor costs. Periodic maintenance steps will be needed to keep the look and feel of the finish up to your standards. With this step, an autoscrubber or 175 rpm buffer with a white pad is used with the NewAge Replay Maintenance Cleaner to give a more thorough, deep cleansing. This will minimize the chance of contamination from damaging the floor and reducing overall labor costs.

## NewAge Waterbased Finishes



### Double Overtime

Double Overtime is our top sport finish for durability and appearance. A premium two-component waterborne wood floor finish. Specifically formulated for professional use on maple sport floors, providing a tough, high-build urethane finish. X-Link Crosslinker included.

**5 gallon pail - 32002**  
**1 gallon (3/cs) - 32005**  
**12.7 oz. X-Link - 32003**



### Full Court Press

Full Court Press is an excellent one-component sport finish for durability and appearance. A premium waterborne wood floor finish, it's specifically formulated for professional use on maple sport floors, providing a tough, urethane finish with good build.

**5 gallon pail - 32001**  
**1 gallon (3/cs) - 32006**

## NewAge Oil-based Finishes



### OMU Poly 500/43

OMU Poly 500/43 is a premium quality, oil-modified polyurethane developed specifically for the wood sport floor industry. This finish provides an extremely tough, high build gloss finish with superior flow and leveling.

**5 gallon pail - 32010**



### OMU Poly 450/50

OMU Poly 450/50 is a premium quality, oil-modified polyurethane developed specifically for the wood sport floor market. This finish provides an extremely tough, high build gloss finish with excellent chemical resistance, protecting against perspiration and routine cleaning.

**5 gallon pail - 32011**



### OMU Poly 350/55

OMU Poly 350/55 is a premium quality, high solids oil-modified polyurethane developed specifically for the wood sport floor market. This finish is low in VOC, and provides an extremely tough, high build gloss finish with excellent chemical resistance, protecting against perspiration and routine cleaning.

**5 gallon pail - 32013**

## Finish property chart

Property	Double Overtime	Full Court Press	OMU Poly 500/43	OMU Poly 450/50	OMU Poly 350/55
Solids %	28%	32.50%	43%	50%	55%
VOC per g/l**	<350	<145	<500	<450	<350
Pot Life	8 hrs	N/A	N/A	N/A	N/A
Coverage	500-600	500-600	500-600	500	550-600
Dry Time*	2-3 hours	2-3 hours	8-12 hours	12-16 hours	18-24 hours
Abrasion Resistance	Excellent	Very Good	Good	Good	Good

\*Dry times are gauged under conditions of 65 to 80° F and 40 to 60% humidity.

\*\*Please check with all local, state and federal regulations regarding VOC limitations.








# NewAge

## Sports and Commercial Wood Floor Care Program

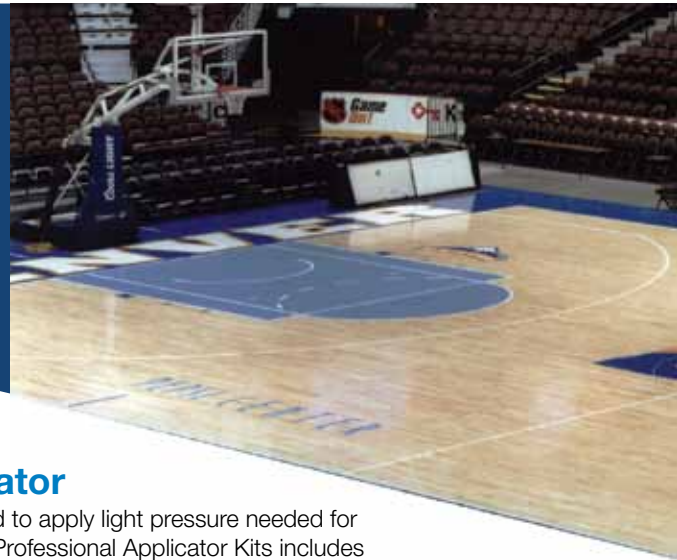

### Application tools



#### NewAge Lightweight (LW) Applicator

Our 18" waterbased finish applicator is precisely weighted to apply light pressure needed for an even finish coat every time. NewAge LW 18" and 24" Professional Applicator Kits includes one piece heavy-duty 60" steel handle, applicator and one Nylfoam applicator refill.

**NewAge LW 18" Applicator - 47003**

**NewAge LW 18" Professional Applicator Kit - 47001**

**NewAge LW 24" Professional Applicator Kit - 47007**



#### NewAge Heavyweight (HW) Applicator

Our 18" finish applicator is precisely weighted to apply consistent pressure needed for a level oil-based finish application. NewAge HW 18" and 24" Professional Applicator Kits includes one piece heavy-duty 60" steel handle, applicator and one Nylfoam applicator refill.

**NewAge HW 18" Applicator - 47002**

**NewAge HW 18" Professional Applicator Kit - 47004**

**NewAge HW 24" Professional Applicator Kit - 47008**



#### NewAge Applicator Refills

Specially designed Nylfoam applies a precise, smooth and lint-free finish to wood, concrete, tile and slate surfaces. Use with waterbased and oil-modified based finishes.

**NewAge 18" Applicator Refills (6/cs) - 47005**

**NewAge 24" Applicator Refills (6/cs) - 47009**



#### NewAge Finish Pour Bucket

A high efficiency, easy-fill finish pour bucket. Significantly increases speed of laying finish. Pour finish directly onto surface during application. High impact, solvent resistant molded plastic

**NewAge Finish Pour Bucket - 47006**

