


WARRIOR

GRAFFITI REMOVER

FOR EXTERIOR SURFACES

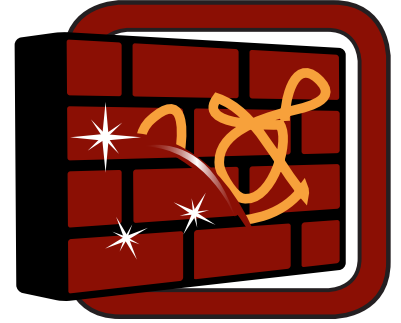

Technical Data

Areas of Use

- Department of Transportation
- City Municipalities
- County Maintenance
- Housing Authorities
- School Districts/Universities/Colleges
- Park Departments
- Retail/Shopping Centers
- Property Maintenance
- Office/Building Facilities
- Parking Garages
- Stadiums/Arenas
- Service Contractors

Description

- Powerful, deep penetrating remover
- Designed for a variety of exterior surfaces
- Versatile application methods
- Can be applied to wet or dry surfaces
- Fast activation – 90 seconds
- Superior graffiti removing results in one application
- No damage to original surface
- Easy water clean up
- Cost effective - saves time and money

Specifications

| | |
|---------------------------|--------------------------|
| Available Sizes..... | 12/1P, 12/1Q, 4/1G, 1/5G |
| Physical State..... | Liquid |
| Color..... | Reddish/Brown |
| Fragrance..... | Strong Solvent Odor |
| pH..... | 14 (very alkaline) |
| Shelf Life..... | 12 Months |
| <u>HMIS Hazard Rating</u> | |
| Health..... | 2 |
| Flammability..... | 3 |
| Physical Hazard..... | 1 |
| Personal Protection..... | H |

WARRIOR Graffiti Remover is an easy to use liquid graffiti remover with deep penetration and fast acting power. WARRIOR is a chemical blend containing Sodium Hydroxide and surfactants in a specially formulated solvent solution. WARRIOR quickly dissolves and breaks down most graffiti coatings with 90 seconds; allowing it to be easily removed by pressure washing with water. Excellent removal from exterior surfaces such as brick, masonry, concrete, stone, aggregate panels, asphalt surfaces, mild and stainless steel, wood, painted surfaces and more.

What the Pros Know

- Can be used on painted surfaces.
- Great for brick, masonry and concrete.
- Works on asphalt surfaces – like streets and parking lots.
- Performs on most stucco surfaces.

Directions

Apply to surface with nylon brush, lamb's wool blend roller, or recommended chemical sprayer; letting product activate for a minimum of 90 seconds before removal. Remove by pressure washing (hot or cold water) at 2200 psi.

Graffiti Remover for Exterior Surfaces

• **Fast Acting**

• **Excellent Performance**

