




Square Cat 2014™

Oscillating Floor Machine

Better Floor Care Results, Faster



The SSS Square Cat 2014 Oscillating Floor Machine provides best-in-class results on VCT floor finish, wood and stone floors in office buildings, schools, gymnasiums, universities, hospitals, clinics, retail stores and other facilities. **Super-efficient** — Scrubs 1,600 sq. ft./hr. (VCT) to 2,500 sq. ft./hr. (wood) – twice as fast as conventional rotary-style machines. **Complete coverage** — Rectangular pad scrubs from edge to edge, including troublesome corners missed by other machines. **Power to spare** — Commercial 1.5 HP, 180 frame, TEFC motor provides smooth, quiet operation.



Top and bottom weights reduce vibration while providing up to 65 lbs. of pad pressure.


SSS Square Cat 2014 Features:

- Heavy-duty 1.5 HP, 1740 RPM, 180 frame, TEFC motor
- Thumb-operated on/off switch
- Twin operating triggers for left or right-handed operation
- Comfortable vinyl hand grips for ease of use
- Variable-position, positive-lock handle for safety and comfort
- One-piece, heavy-duty chrome steel handle
- Large non-marking 8" dia. x 2" wide ball-bearing wheels
- Rugged powder-coated, welded steel frame
- Heavy-duty transportation lock
- Two-piece, 55' 12-3 safety-orange power cord
- UL listed





Square Cat 2014™ Oscillating Floor Machine

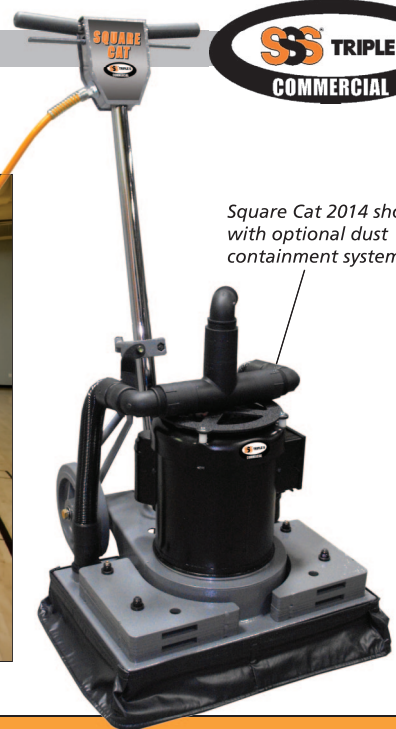

Square Cat 2014 shown with optional dust containment system

Heart of the EarthCare® Dry Scrub Process

Removing VCT floor finish once required gallons of messy stripping chemical and water. Now, there's a better way. The EarthCare dry scrub method – using the SSS Square Cat 2014 with SSS Eco1000 Maroon Strip-Prep Pad – lets you remove layers of floor finish using no water or chemicals of any kind.



The process is completely dry – simply vacuum the dust after scrubbing. An optional universal dust-containment adapter allows you to connect the SSS Square Cat 2014 to a canister or back-pack vacuum, for removal of both finish and dust residue in one easy step.

- Floors stay dry, greatly reducing risk of slips and falls
- Green friendly – saves water, eliminates need for potentially harmful chemicals
- Scrub and collect dust in one operation with optional dust containment system

Accessories

Item #	Size	Description	Pack
31269	14"x20"	SSS Eco1000 Maroon Strip-Prep Pad	10/cs.
31240	14"x20"	SSS Black Stripping Pad (Other colors available)	5/cs.
82002		Universal Dust Containment Adapter	1/cs.

Specifications

Model	SSS Square Cat 2014
Item #	82001
Pad Size/Cleaning Path	14" x 20"
Coverage Rate	VCT: 1,600 sq. ft./hr.; Wood: 2,500 sq. ft./hr.
Pad Driver Type	Combination Pad Holder/ Diamond Pad Driver
Motor	TEFC, 1.5 HP, 1740 RPM, 180 Frame
Oscillations	1740 RPM
Amp Draw (running)	9
Extended Wear Vibration Compensators	4 each, 2"
Maintenance Intervals	400-500 hrs.
Wheels	8" dia. x 2" wide Ball Bearing
Pad Pressure	0.46 lbs./in.
Weights (Other weights available)	4 top weights – 11¾ lbs. each 1 bottom weight – 18 lbs.
Power Cord	2-Piece 55' Safety Orange 12-3 SJTOW
Total Weight	194 lbs., 217 lbs. shipping wt.
UL listed	Yes
Warranty*	1 year parts/labor

*See manual for complete details.

Product specifications subject to change without notice.